




*Making you more productive.*

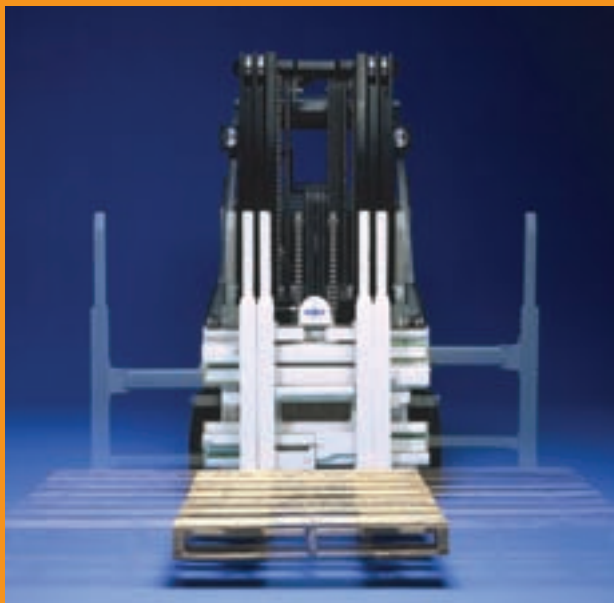

# Multiply your productivity.

With a Cascade Multiple Pallet Handler your productivity is, in effect, multiplied. With a Single-Double, you can spread the forks to carry two pallets at once – double load handling means fewer trips. Close the forks to carry just one pallet – and because the attachment frame is less than the width of the lift truck, you have the same maneuverability as with a regular single-load fork truck. Single-Double-Triples offer even more productivity.

Whether you're a bottling, brewing, chemical, paper, food production or warehouse/shipping facility, our Multiple Pallet Handlers will improve your efficiency. And not just because of the productive single/double/triple spread capability. We've added other valuable features designed to maximize service life, reduce damage and minimize downtime.



## **Double Sideshifters (2 pallets)**

Double Sideshifters are generally specified for applications that handle double unit loads exclusively. The driver can pick loads that are separated, bring them together, sideshift both loads, and spread them.

## **Key benefits**

### **Durability**

Major bearing and hydraulic system improvements increase service life and reduce downtime.

### **Serviceability**

Bearings and cylinders can be serviced without removing the arms or disconnecting any hydraulics. The inner fork sequence mechanism can be replaced in minutes.

### **Protected Components**

Cylinders, cylinder rods and valve are well protected to minimize the possibility of damage.

### **Fast, Uniform Motion**

The true hydraulic flow divider provides fast, uniform fork motion. A bi-directional pressure relief valve ensures compatibility with all lift truck hydraulic systems.

### **Visibility**

The high-visibility frame features open windows for superior visibility. Cylinders are integrated with the frame and all hydraulic hoses have been eliminated.

### **International Industry Standards**

This product complies with all current Industrial Truck Association (ITA), International Standard Organization (ISO), and European Community (CE) standards.



Spread the forks to carry two pallets.



Close the forks to carry one pallet.



### **Single-Double Pallet Handler (1-2 pallets)**

Use the same lift truck to handle either single or double wide pallet loads. These highly versatile attachments allow you to achieve the productivity gains of double load handling without sacrificing the ability to handle single pallets in narrow aisles. Forks are hydraulically positioned and synchronized for fast and efficient material handling.




### **Triple Pallet Handler (1-2-3 pallets)**

Built to handle either single, double or triple wide pallet loads. Achieve the productivity gains of double or triple unit load handling without sacrificing the ability to handle single pallets. Forks are hydraulically positioned and synchronized for fast and efficient material handling. Well suited for truck trailer loading and unloading of Europallets.



### **Double Deep Pallet Handlers (up to 6 pallets)**

Built for fast loading and unloading of trailers. 2.4-meter-long forks allow two-deep pallet handling. Two, four or six pallets can be handled in one lift. Trailers can be loaded in three lifts from one side.

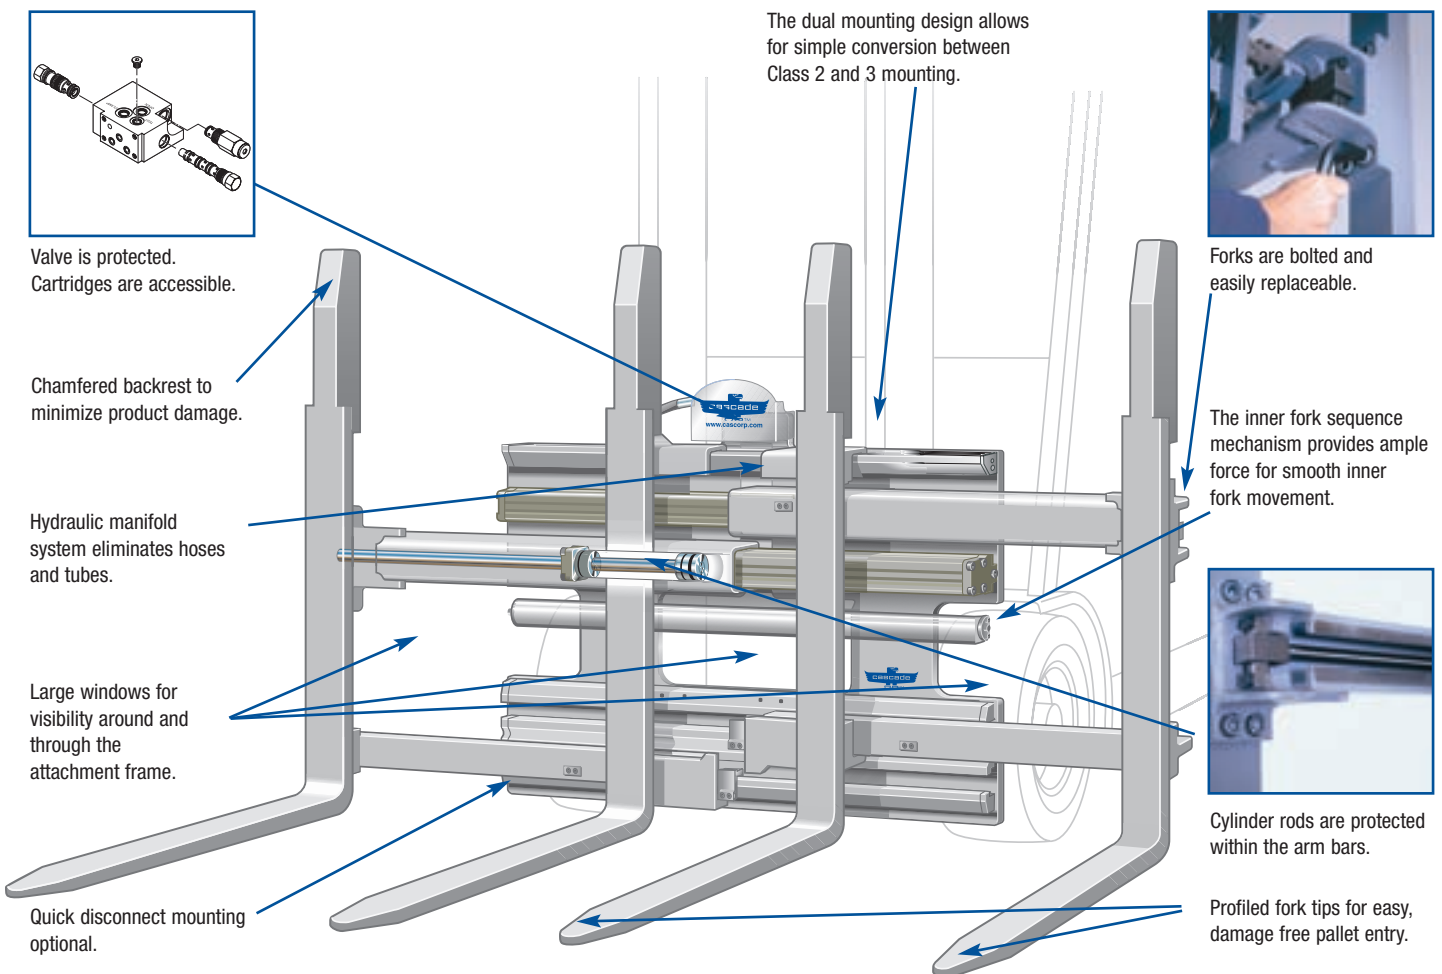

***Whatever the application, we can handle it.***

# Improve your bottom line.



Close loads together for better transport stability.



Spread loads against the inside trailer walls.



Narrow frame allows same maneuverability as a single-load truck.



Picking a single pallet load.



## OPTIONS

- Load Backrests: a durable tube-type load backrest is standard. See specification sheet for standard height. Other heights available.
- Interlocking finger load backrests—beverage and produce types.
- Center load backrest.
- Various fork lengths and sections.
- Various fork set spreads.
- Drop shank forks: forks are lowered relative to the attachment frame.
- Fork wear strips: hardened steel bars added to bottom of forks and attachment frame to reduce fork wear.
- Various frame widths, fork dimensions and opening ranges.
- Independent fork set control: allows moving left or right fork set independent of the opposite fork set.



**ISO 9001:2000  
CERTIFIED**

Cascade Europe • Damsluisweg 56 • PO Box 3009 • 1300 EL, Almere, Netherlands • Tel. : +31 (0)36 54 92 911 • Fax. : +31 (0)36 54 92 964  
Cascade (UK) Ltd. • Unit 4, 12 O'Clock Court • Attercliffe Road • Sheffield S4 7WW, England • Tel +44 (0) 870 850 8756 • Fax +44 (0) 870 850 8757

**cascade**  
**EUROPE**  
www.cascorp.com